


*Data extrapolated from 11-24 Boeing Wind Tunnel testing and mechanical BallastRack hydraulic load testing.

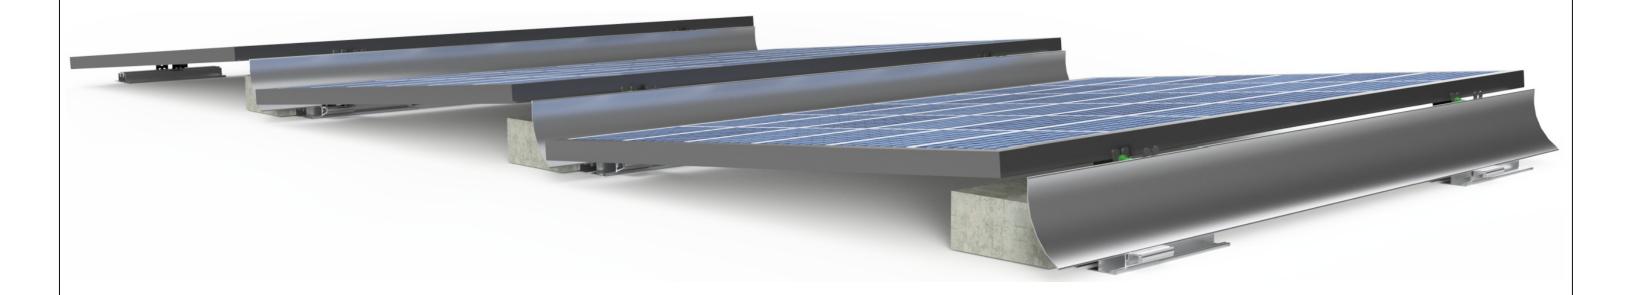



Specifications:

- Designed for ballasted deployment of solar modules on flat roofs or flat ground scenarios.
- Utilizes standard 32lb 4in x 8in x16in CMU cinder blocks.
- Roof material slip sheets (9in x 6in) recommended underneath each base.

1 1 1 1 1 1 1 1 1 1	In	_	DB Solar	Racking Sys	tem
APPROVED	SIZE	CODE	DWG NO		REV
CHECKED	В				
DRAWN Paul Budge 9/25/2025	SCA	LE	WEIGHT	SHEET 1/3	

IR-05MBDB	Solar Racking Syster	n					
	Module size up to 24 sqft	Module size up to 34 sqft					
Maximum Snow Load							
	100psf	65psf					
Maximum Wind Speed (Ballast Block and Wind Spoiler REQUIRE							
2 Base Mounts per panel 20lb CMU Blocks	100mph	80mph					
3 Base Mounts per panel 20lb CMU Blocks	120mph	100mph					
2 Base Mounts per panel 32lb CMU Blocks	140mph	100mph					
3 Base Mounts per panel 32lb CMU Blocks	160mph	120mph					

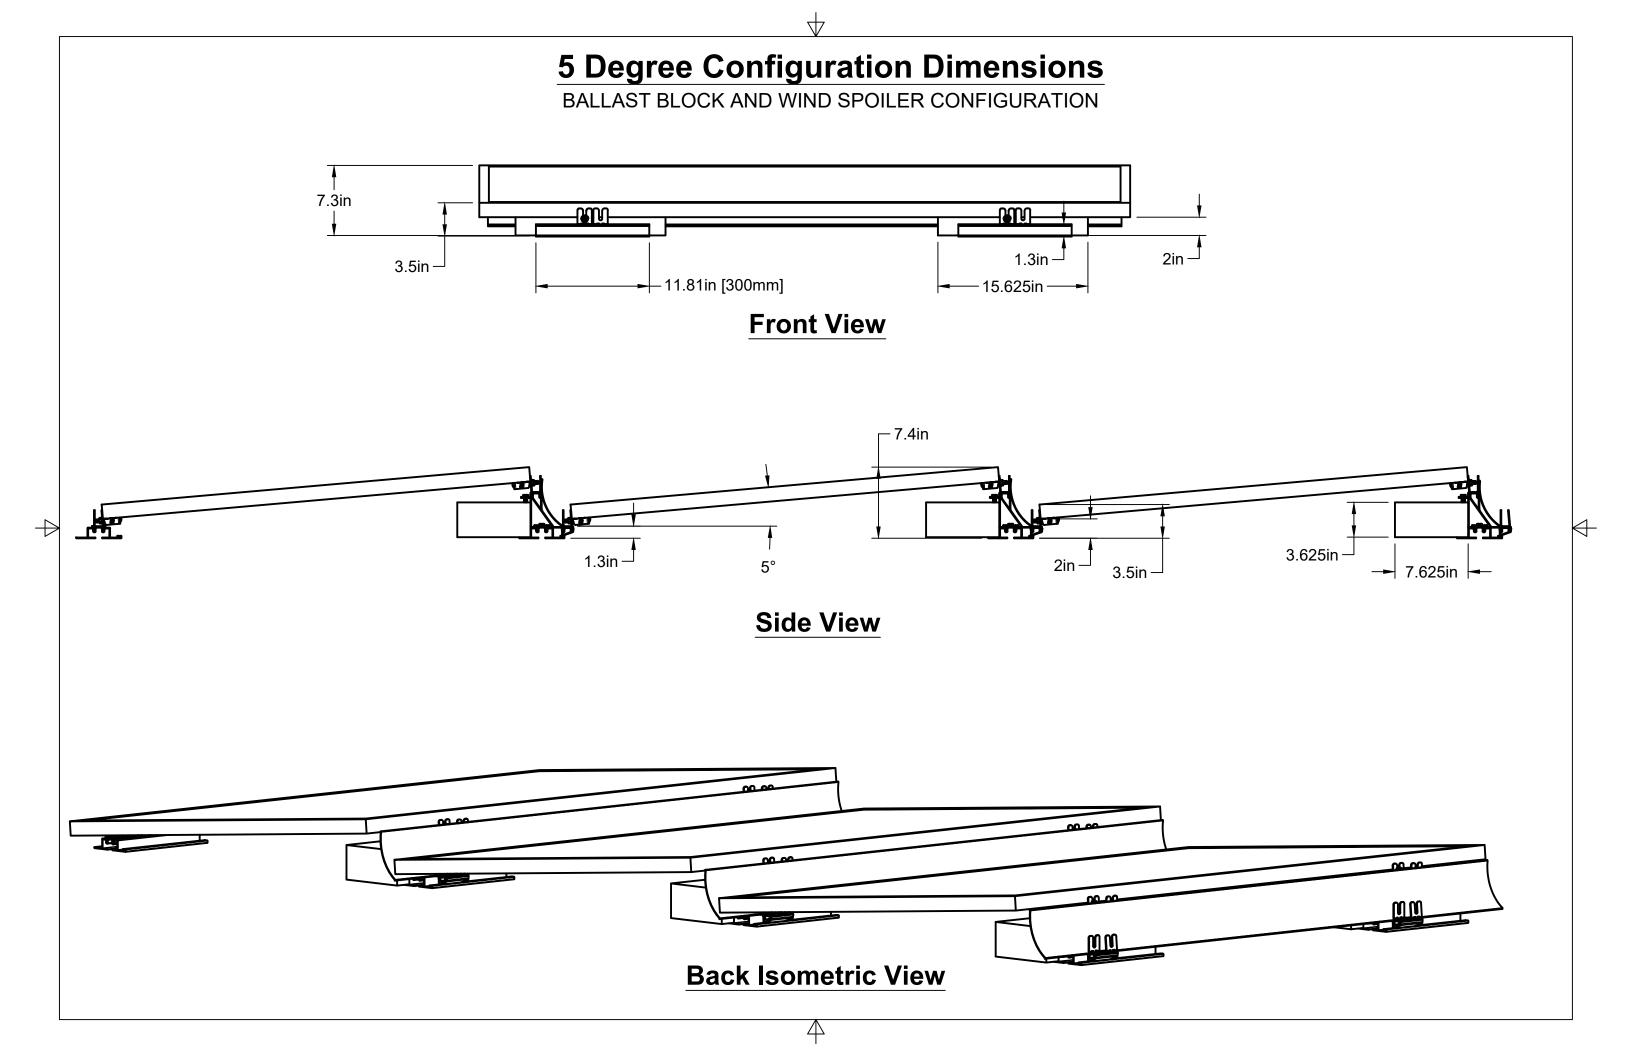

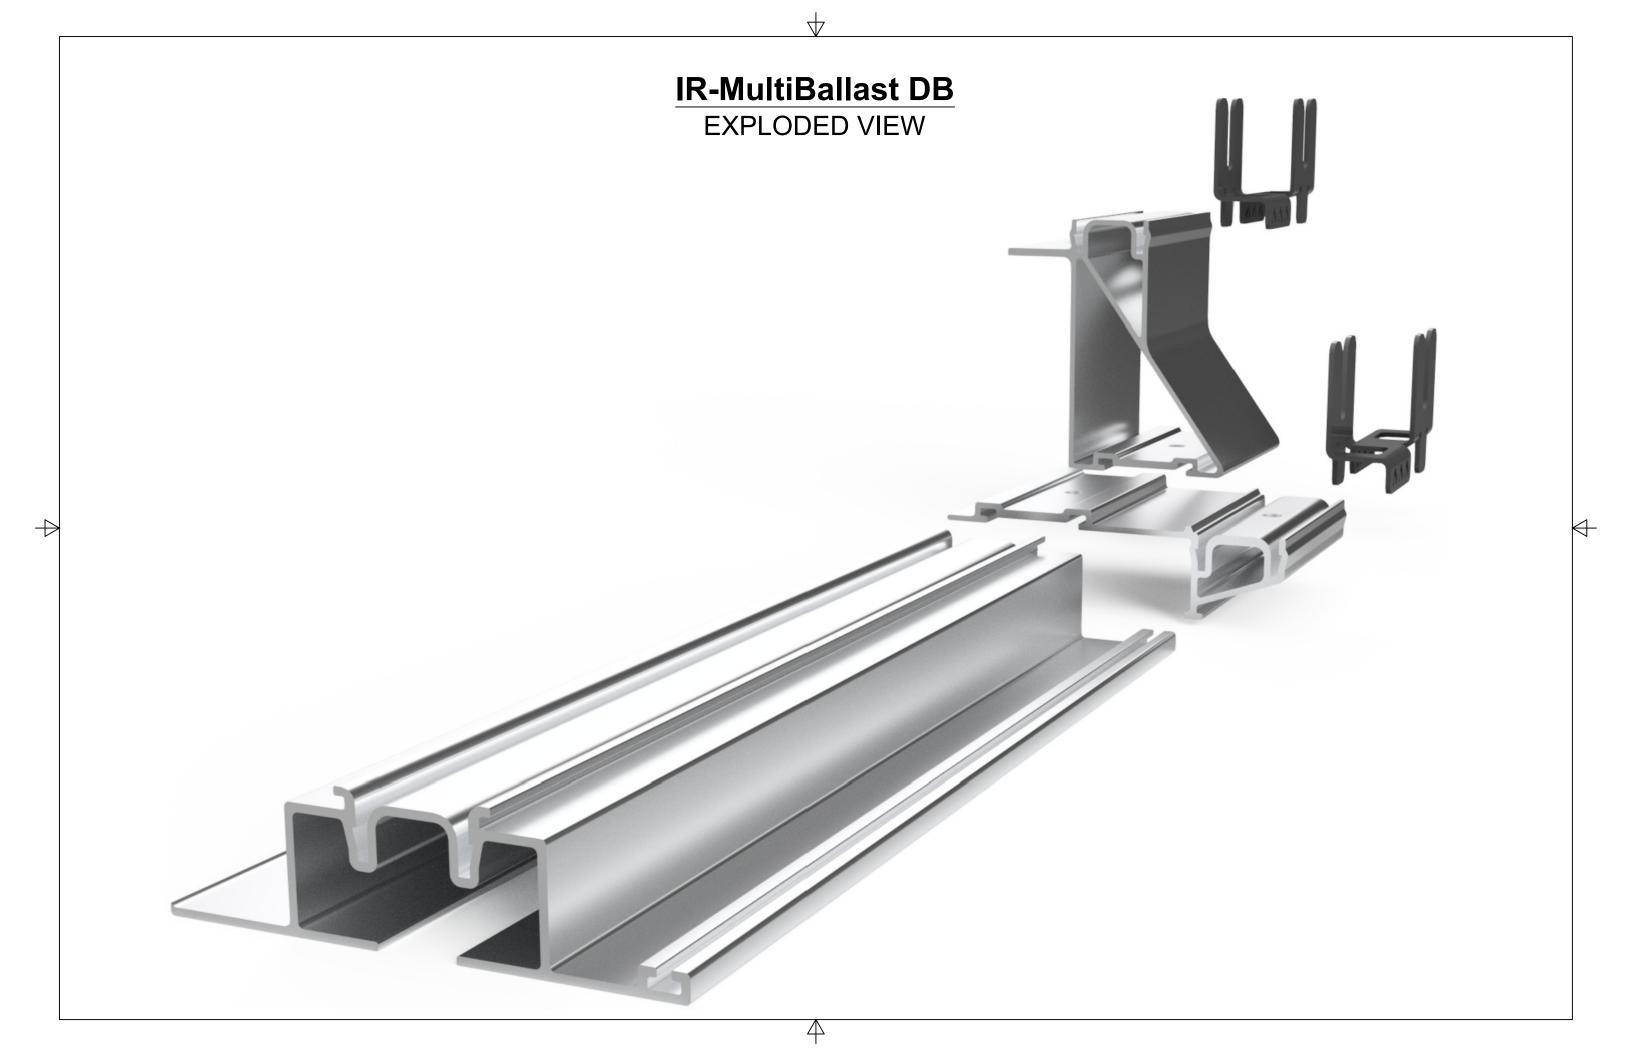



Mr. Paul Budge Diversi-Tech Corp – IntegraRack PO Box 910758 St. George, UT 84791

Subject: Witness of Wind Tunnel Testing on IntegraRack Products at the George E Boeing Aeronautics Department (Kirsten Wind Tunnel) at the University of Washington

Dear My. Budge,

This letter summarizes the wind tunnel testing that was witnessed at the Kirsten Wind Tunnel (KWT) on November 8th, 2024. Testing took place at KWT on the University of Washington campus at 3900 7th Ave NE, Seattle, WA. Cara Winter was the manager of the facility and testing was performed and overseen by Test Engineers Stuart Dickson and Miguel Salguero. A detailed analysis and calculations of test data is outside the purview of this report and can be provided by KWT personnel.

The wind tunnel data summarized in this report, mechanical material stress testing and solar mount adhesion testing performed by PNL, and simulated wind/snow load model data was extrapolated on product datas sheets by IntegraRack for various product configurations and solar angles for the following IntegraRack solar panel products: TileBallast, BallastRack, BallastRack DR, MultiBallast, MultiBallast DB, H Module Brack, and the IR-F2 Bonding Clamp.

A total of 8 runs were performed on IntegraRack products. Test Runs 1 through 3 were performed with the IR-D1 bracket (See Figures 1-4) with an installed 18 SF solar panel on a simulated roof incline. Run 1 was performed to tare KWT's system through the full 0 to 110 degree rotation of the test platform with the simulated roof and panel installed. The roof surface had been installed at an approximate 5 – 6 degree incline (See Figure 1). The solar panel was mounted at 0 degrees relative to the roof surface with a general height of 5 in from the roof surface. at all four corners of the panel. Test Runs 4 and 5 were performed on the same panel and bracket with the panel height adjusted and installed at an angle with the front corners set to 3-1/2 in. and the back corners set to a height of 6 in. from the roof surface.

Test Runs 2 through 5 included rotating the test setup from 0 to 110 degrees while KWT instrumentation recorded test data. Wind speed was increased until limitations of KWT instrumentation prevented it from being increased further. Four load cells, Omega model LC103B-250 lb Class N10, were installed between the IntegraRack bracket and the roof surface to monitor and record loads applied to the brackets throughout testing (See Figures 5-10). The load cells were labeled LC0-1, LC0-2, LC5-3, and LC5-4 with LC0 being installed at the leading edge and LC5 being installed at the back edge.

The maximum load at a bracket recorded during Test Runs 2 and 3 was 75.015 lbf at a wind speed of 157.67 MPH when the panel was at a rotation point of 60 degrees. No damage or deformation was noted



to any bracket during or after the test runs and all hardware was found to be secure upon completion of each test (See Figures 11-13).

Test Runs 6 through 8 were performed on the IR Ballast Racks (See Figures 14-32). The simulated roof structure was removed and the frames and panel were mounted directly to the KWT test platform. These runs were performed at a set angle with no platform rotation during the test run. Two load cells were used for the test setups and were mounted at the brackets at the leading edge of the test platform at the wind intake side.

Run 6 was performed on the IR18C with the solar panel at an approximate 18 degree angle (Figures 24-25). The maximum load at a bracket recorded during Test Run 6 was 168.59 lbf at a wind speed of 101.59 MPH. Runs 7 and 8 were performed on the IR30C with the solar panel at a 30 degree angle (Figures 30-32) with Run 7 having the solar panel mounted and aligned with the wind direction to produce maximum forces on the frame and Run 8 being run in an orientation 90 degrees offset from Run 7. The maximum load at a bracket was during Test Run 7 and was 183.38 lbf at a wind speed of 81.138 MPH. Run 7 was stopped when the drag limit of the KWT test apparatus was reached. The solar frame experienced shaking under wind load but no damage was found to any part and all bolts were found to still be tight and in place after the test run. Run 8 was pitch limited by the KWT test apparatus. Similar to Run 7 the frame and solar panel had experienced shaking under load but no damage to the frame or panel was noted and all bolts and connections remained tight.

Test data tables provided by KWT and photos of testing throughout the Test Runs have been attached.

KYLEI

Respectfully submitted,

PHOENIX NATIONAL LABORATORIES, LLC

Kyle Fleege, P.E.

Project Manager / Mechanical Engineer

Phoenix National Laboratories

Ph: 1.602.431.8887 kyle@pnltest.com www.pnltest.com



Test data tables provided by Kirsten Wind Tunnel tests are shown below:

RUN	TEST	TP	PSI	QA	QC	SPEEDMPH	LC0-1	LC0-2	LC5-3	LC5-4	DB	LB
2	2379	3	0.0001	16.775	17.799	84.38	1.1732	0.9254	12.114	13.537	0	0
2	2379	4	9.9998	16.676	17.693	84.13	3.3832	0.1309	13.25	12.918	0	0
2	2379	5	20	16.788	17.813	84.414	6.5054	-1.2426	14.882	15.703	0	0
2	2379	6	30	14.846	15.752	79.391	8.6943	-2.5876	11.917	15.932	0	0
2	2379	7	40	15.216	16.144	80.374	10.566	-3.614	9.2887	17.334	0	0
		_										
2	2379	8	50	15.91	16.881	82.19	12.154	-4.7729	5.8138	18.225	0	0
	0070		00	47.540	10.014	00.011	45.004	4.7400	0.400	40.074		
2	2379	9	60	17.543	18.614	86.311	15.831	-4.7168	3.432	19.871	0	0
2	2270	10	70	10.075	10 177	07.000	15.000	2.0047	1 0710	17.010	0	0
	2379	10	70	18.075	19.177	87.609	15.929	-2.9647	1.6713	17.613	U	0
2	2379	11	80	19.807	21.015	91.718	16.576	-0.2715	1.6043	16.188	0	0
	2070	11	- 00	13.007	21.013	31.710	10.570	-0.2713	1.0045	10.100		0
2	2379	12	90	26.487	28.103	106.081	20.349	2.4846	2.6014	20.856	0	0
_	2070	12		20.407	20.100	100.001	20.040	2.4040	2.0014	20.000	<u> </u>	
2	2379	13	100	27.443	29.117	107.995	23.246	3.9239	1.6397	26.417	0	0
_								3.0200				
2	2379	14	110	28.046	29.758	109.19	30.304	4.9443	0.4954	31.084	0	0



Test data tables provided by Kirsten Wind Tunnel tests are shown below:

RUN	TEST	TP	PSI	QA	QC	SPEEDMPH	LC0-1	LC0-2	LC5-3	LC5-4	DB	LB
3	2379	2	-0.0001	46.765	49.618	141.561	1.1642	2.3972	36.627	39.938	0	0
3	2379	3	10	47.13	50.006	142.153	7.9853	-0.2581	42.362	39.215	0	0
3	2379	4	20	48.375	51.327	144.054	17.809	-5.1282	48.033	50.868	0	0
		_										_
3	2379	5	30	50.382	53.456	147.043	28.671	-12.013	46.107	61.281	0	0
	0070		40	F0.000	FC 100	150 770	00.405	00.577	00.05	00.044	0	0
3	2379	6	40	52.966	56.198	150.773	36.485	-22.577	33.65	68.344	0	0
3	2379	7	50	54.38	57.698	152.791	44.03	-28.356	17.304	72.349	0	0
3	2070	,	30	34.30	37.030	102.701	44.00	-20.550	17.504	72.040		0
3	2379	8	60	57.878	61.409	157.674	56.195	-27.306	4.63	75.015	0	0
												_
3	2379	9	70	56.226	59.656	155.402	54.153	-16	-2.0357	62.293	0	0
3	2379	10	80	53.778	57.059	151.975	48.502	-4.0685	-2.0692	49.307	0	0
3	2379	11	90	57.92	61.454	157.771	47.213	3.5417	-0.5077	50.257	0	0
3	2379	12	100	54.454	57.777	152.979	46.905	6.1752	-4.2226	55.18	0	0
3	2379	13	110	36.199	38.408	124.779	34.937	5.9472	-9.3307	38.454	0	0



Test data tables provided by Kirsten Wind Tunnel tests are shown below:

RUN	TEST	TP	PSI	QA	QC	SPEEDMPH	LC0-1	LC0-2	LC5-3	LC5-4	DB	LB
5	2379	3	0.0003	14.845	15.03	77.742	43.468	45.917	33.192	35.332	0	0
5	2379	4	10	14.115	14.291	75.806	39.406	45.863	32.548	33.352	0	0
5	2379	5	20	14.301	14.479	76.302	41.216	49.171	36.107	33.865	0	0
			_									_
5	2379	6	30	15.476	15.669	79.377	43.323	49.791	40.199	30.547	0	0
	0070	_	40	45 700	45.000	00.404	40.07	44.540	07.010	00.040		
5	2379	7	40	15.792	15.989	80.181	40.37	44.513	37.812	28.348	0	0
5	2379	8	50	15.441	15.633	79.284	34.815	34.07	29.669	27.254	0	0
3	23/9	0	50	15.441	13.633	79.204	34.013	34.07	29.009	27.254	0	0
5	2379	9	60	14.604	14.787	77.107	25.852	21.071	18.666	23.403	0	0
	2070		- 00	14.004	14.707	77.107	20.002	21.071	10.000	20.400		
5	2379	10	70	15.452	15.644	79.315	19.532	11.214	10.48	19.561	0	0
5	2379	11	80	15.788	15.985	80.173	13.097	5.1532	4.4544	14.183	0	0
5	2379	12	90	15.937	16.136	80.55	10.261	2.0128	0.5043	11.748	0	0
5	2379	13	100	14.945	15.131	77.998	9.7597	-1.4293	-4.2425	10.805	0	0
5	2379	14	110	15.231	15.421	78.745	10.539	-5.6497	-13.113	8.2362	0	0



Test data tables provided by Kirsten Wind Tunnel tests are shown below. Blockage corrections to calculate DB and LB ARE APPROXIMATION and were provided by KWT Test Engineers using a simplified version of Shindo's method, outlined in "Simplified Tunnel Correction Method" by Shojiro Shindo, American Institute of Aeronautics and Astronautics, Inc.< Washington DC, 1994: Journal of Aircraft Volume 32, Number 1, Pages 210-213. LB is the lift value and DB is the drag value after wind-off zero values have been subtracted.

RUN	TEST	TP	PSI	QA	QC	SPEEDMPH	LC0-1	LC0-2	LC5-3	LC5-4	DB	LB
6	2379	2	-0.0006	19.964	25.663	101.585	-206.622	-168.586	0.6796	0	244.379	363.911
6	2379	3	-0.0005	19.922	25.611	101.499	-206.361	-167.906	0.5212	0.0001	243.946	363.13
6	2379	4	-0.0005	18.132	23.265	96.748	-185.481	-146.788	-0.5698	0	220.212	326.42
6	2379	5	-0.0004	14.927	19.087	87.632	-146.747	-110.624	1.6089	0	178.639	262.798
6	2379	6	-0.0004	10.021	12.738	71.584	-89.117	-53.252	1.1724	-0.0001	116.858	169.83



Test data tables provided by Kirsten Wind Tunnel tests are shown below. Blockage corrections to calculate DB and LB ARE APPROXIMATION and were provided by KWT Test Engineers using a simplified version of Shindo's method, outlined in "Simplified Tunnel Correction Method" by Shojiro Shindo, American Institute of Aeronautics and Astronautics, Inc.< Washington DC, 1994: Journal of Aircraft Volume 32, Number 1, Pages 210-213. LB is the lift value and DB is the drag value after wind-off zero values have been subtracted.

	TEST	TP	PSI	QA	QC	SPEEDMPH	LC0-1	LC0-2	LC5-3	LC5-4	DB	LB
RUN												
7	2379	2	-0.0001	10.101	16.001	80.229	-165.145	-179.17	-0.0654	0	239.012	297.932
7	2379	3	0	10.304	16.363	81.138	-170.329	-183.382	1.6992	0	245.281	304.603
7	2379	4	0	4.9808	7.7789	55.942	-70.106	-82.668	1.1755	0	113.803	142.75

RUN	TEST	TP	PSI	QA	QC	SPEEDMPH	LC0-1	LC0-2	LC5-3	LC5-4	DB	LB
8	2379	2	90.001	10.165	11.329	67.503	-1.1756	-7.5189	-1.3941	0	51.808	28.96
8	2379	3	90	15.002	16.716	81.993	-13.771	-17.132	0.1391	0	76.302	40.688
8	2379	4	90	17.966	20.011	89.723	-21.883	-23.854	0.307	0	91.033	50.149
8	2379	5	90	24.873	27.701	105.599	-45.078	-38.33	-0.174	0	125.875	68.707
8	2379	6	90	27.029	30.099	110.103	-53.423	-43.1	0.5537	0	136.673	76.038
8	2379	7	90	31.751	35.352	119.364	-71.986	-54.265	-0.7512	0	160.314	91.156
8	2379	8	90	39.784	44.294	133.708	-102.541	-76.2	0.5756	0	200.798	112.886







Figure 1: Run 1 through 3 simulated roof setup

Figure 2: Run 1 through 3 setup with panel Figure 3: Bracket at leading edge LC0-1, LC0-2



Figure 4: Bracket at back edge LC5-3, LC5-4



Figure 5: Load Cell Model used for tests

Figure 6: Height from roof to panel, Runs 2 & 3



Figure 7: LC0-1 Location

Figure 8: LC0-2 Location

Figure 9: LC5-3 Location





Figure 10: LC5-4 Location

No damages or loose hardware noted.

Figure 11: Setup after Run 2, 109 mph winds. Figure 12: Setup after Run 2, 109 mph winds. No damages or loose hardware noted



Figure 13: Setup after Run 2, 109 mph winds. No damages or loose hardware noted

Figure 14: Setup for Run 6 with IR Ballast Frame

Figure 15: Load cell location at leading edge, LC0-1 & LC0-2

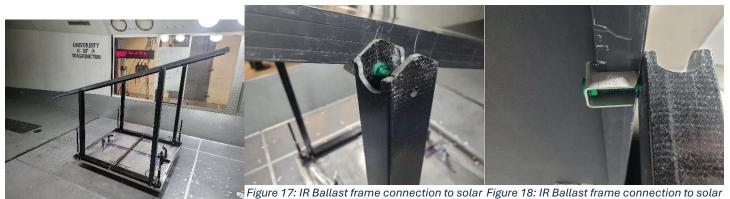


Figure 16: Test setup for Run 6

panel panel





Figure 19: Test setup for Run 6




Figure 20: Solar panels total length, Run 6 through 8



Figure 21: Solar panels total length 83 in.



Figure 22: Solar panels width, Run 6 through 8



Figure 23: Total width 41-1/4 in.



Figure 24: Run 6 trailing edge leg height



Figure 25: Run 6 leading edge leg height

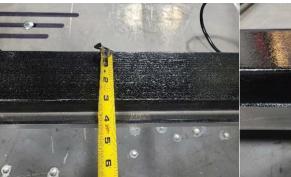


Figure 26: Frame base support width




Figure 27: Frame base support height





Figure 28: IR Ballast rack leg width 1



Figure 29: IR Ballast rack leg width 2



Figure 30: Runs 7 - 8 Test setup



Figure 31: Run 7 trailing edge leg height



Figure 32: Run 7 Leading edge leg height



An and Company

Phoenix National Laboratories, LLC
941 S. Park Lane, Tempe, AZ 85281
P: 602.431.8887 * www.pnltest.com

PNL REF. # 26-251512 S.O. # 001 INDEX 01

Page 1 of 6

					rage i oi i				
CLIENT		PROJECT/TE	ST DESCRIPTION		CLIENT ORDER NO.				
Diversi-Tech Corp	ooration Mul	Itiballast DB to T	per S.A.						
PNL PROJECT NO.	S.O. NO.	TES	T DATE		REPORT DATE				
26-251512	001	10/1	3/2025		10/15/2025				
	TEST CONDITIONS & EQUIPMENT INFORMATION								
Temperature:	73 °F ± 5	i°F	Hum	idity:	50 % ± 5 %				
Equipment Model:	Instron 5989	9 UTM	Serial Nur	nber:	B22667				
Load Cell:	100 kN (22,481 lbf)	[S/N: 158544]	Test Sp	peed:	Varies (See test summary)				
	Т	EST SPECIMEN INF	ORMATION						
Test Specimen 1:	Multiballas	t DB	Dimensions:		~1-3/8 in. x 11-3/4 in. x 4-3/4 in.				
Test Specimen 2:	Tile Roof SI	hingle	Dimensions:		~ 1 in. x 23 in. x 17 in.				
Test Specimen 3:	H-Module B	H-Module Bracket Dimensions: ~			~ 2-1/2 in. x 3-1/4 in. x 1 in.				
Test Specimen 4:	Tower-Module	Bracket	Dimensions:	,	~ 3-3/4 in. x 3-3/16 in. x 3-1/4 in.				
Adhesive:	Adhesive: Sikaflex 1a Construction Sealant				Unknown				

The Multiballast DB was bonded to a tile shingle by the client (photo 2) using Sikaflex 1a construction sealant (one part polyurethane, elastomeric sealant/adhesive)(photo 1). It was noted that no surface prep was done on the aluminum bracket or the tile shingle, and the test specimens were left in the bed of a pickup overnight during a storm. The test assembly was then clamped to the table of our universal test machine (UTM) using 2x4's and plywood to give adequate clamping force without prematurely damaging the assembly.

Test Summary: Multiballast DB to Tile Shingle

The H-module bracket was installed on the Multiballast DB base mount using the designed slide rails for installation. Using only 1 of the 2 mounting holes on the H-module the UTM was bolted to the H-module bracket (photos 3 and 4) applied a tensile force pulling straight up on the bracket at a test speed of 6 in./min. This led to a failure of the H-module, the interlocking tabs started slipping out of the Multiballast DB base. The H-module bracket was pulled off and the riser bracket was put on (photos 7 and 8) allowing the tensile force to be applied over a more distributed area, with more engagement to the Multiballast DB base and this allowed a high enough load to witness an adhesive failure.

A compression test was also run on this specimen. All table clamps were removed, a fixture was bolted through the H-module (photos 13 and 14) allowing a compressive force to be applied through the H-module, riser, Multiballast DB base, and into the tile substrate at a test speed of 2 in./min. The first cycle load was applied and the test was stopped due to the tile cracking. Test was continued from that point and a compressive force was applied until major permanent deformation was noticed in the H-module and riser bracket.

(Who topphone		
TECHNICIAN	00000010111110	REVIEWED BY	





Page 2 of 6

	OLIENT.		55615	OT/TEOT D		Page 2 of		
	CLIENT	5.4 101			ESCRIPTION	CLIENT ORDER NO.		
Dive	rsi-Tech Corporation		allast DB			Load Test per S.A.		
		S.O. NO.		TEST DATE		REPORT DATE		
	26-251512	001	10	0/13/202	10/15/2025			
		TEN	SION LOAD	TEST DA	ATA			
Test No.	Test Specimen	Displacement at Maximum Load (in.)	Maximum Load (lbf)	Glue Contact Area (sq. in.)	Adhesive Strength (lbf/in)	Observations		
1	Multiballast DB bonded to tile shingle #1 with H bracket (photo 3)	0.602	594	9.1	N/A	Test stopped when H-Module bracket slipped out of Multiballast DB base. Minor deformation was noted in the "H" bracket @ ~ 450 lbf		
2	Multiballast DB bonded to tile shingle #2 with H bracket (photo 4)	0.592	557	9.6	N/A	Test stopped when H-Module bracket slipped out of Multiballast DB base Minor deformation was noted in the "H" bracket @ ~ 430 lbf		
3	Multiballast DB bonded to tile shingle #2 with tower bracket (photo 10)	0.205	1,005	9.6	105	3 corners of the Multiballast DB de-bonded, aluminum to elastomeric sealant. The first corner popped @ ~ 1005 lbf, and the next 2 corners popped @ ~ 919 lbf		
4	Multiballast DB bonded to tile shingle #1 with Riser bracket (photo 9)	0.215	947	9.1	104	3 corners of the Multiballast DB de-bonded, aluminum to elastomeric sealant. The first corner popped @ ~ 919 lbf, the 2 nd corner @ ~ 740 lbf and the 3 rd corner @ ~ 336 lbf		
		COMPR	ESSION LO	DAD TEST	T DATA			
Test No.	Test Specimen	Displacem Maximum L			um Load n.)	Observations		
1	Multiballast DB bonded to tile shingle #2 with tower bracket (photo 15)	0.272	2	7	'29	Test automatically stopped due to load drop when the tile cracked @ 729 lbf		
2	Multiballast DB bonded to tile shingle #2 with tower bracket (photo 16)	0.530)	1,353		1,353		Initial minor deformation was noted starting @ ~ 850 lbf, test continued until major deformation was witnessed load drop after hitting a max load of 1,353 lbf

LABORATORY TEST REPORT

PNL REF. # 26-251512 S.O. # 001 INDEX 01



Page 3 of 6

CLIENT		PROJECT/TEST DESCRIPTION	CLIENT ORDER NO.
Diversi-Tech Corporation		Multiballast DB to Tile Shingle Load Test	per S.A.
PNL PROJECT NO.	S.O. NO.	TEST DATE	REPORT DATE
26-251512	001	10/13/2025	10/15/2025

TEST GRAPHS

Specimen 1 to 4

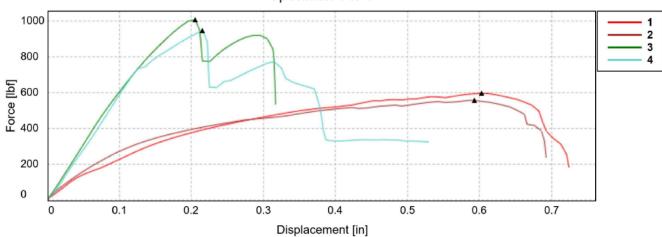


Figure 1: Tension Force vs Displacement test graph

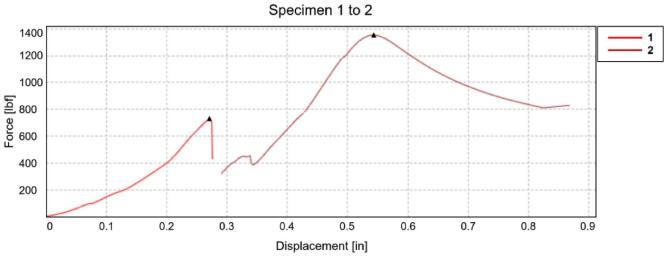


Figure 2: Compression Force vs Displacement test graph



Page 4 of 6

CLIENT		PROJECT/TEST DESCRIPTION	CLIENT ORDER NO.
Diversi-Tech Corporation		Multiballast DB to Tile Shingle Load Test	per S.A.
PNL PROJECT NO.	S.O. NO.	TEST DATE	REPORT DATE
26-251512	001	10/13/2025	10/15/2025



Photo 1: Adhesive used



Photo 3: Tension test, setup #1



Photo 5: "H" bracket deformed and slipped out of Multiballast DB base test #1



Photo 2: Test specimens provided by client



Photo 4: Tension test, setup #2



Photo 6: "H" bracket deformed and slipped out of Multiballast DB base test #2

Page 5 of 6

CLIENT		PROJECT/TEST DESCRIPTION	CLIENT ORDER NO.
Diversi-Tech Corporation		Multiballast DB to Tile Shingle Load Test	per S.A.
PNL PROJECT NO.	S.O. NO.	TEST DATE	REPORT DATE
26-251512	001	10/13/2025	10/15/2025



Photo 7: Tension test setup with riser bracket



Photo 9: Tension test, setup #3



Photo 11: Tension test #2 adhesive failure, aluminum to adhesive



Photo 8: Tension test setup with riser bracket



Photo 10: Tension test, setup #4



Photo 12: Tension test #4 adhesive failure, aluminum to adhesive



Page 6 of 6

CLIENT		PROJECT/TEST DESCRIPTION	CLIENT ORDER NO.
Diversi-Tech Corporation		Multiballast DB to Tile Shingle Load Test	per S.A.
PNL PROJECT NO.	S.O. NO.	TEST DATE	REPORT DATE
26-251512	001	10/13/2025	10/15/2025



Photo 13: Compression test setup

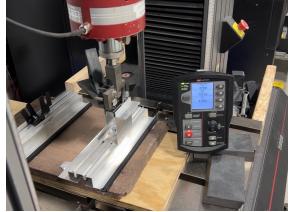


Photo 15: Compression test #1 near max load before tile broke



Photo 17: Compression test #2, permanent deformation visible



Photo 14: Compression test setup



Photo 16: Compression test #2

PRELIMINARY LABORATORY TEST REPORT

PNL
Anale Company
Phoenix National Laboratories, LLC
941 S. Park Lane, Tempe, AZ 85281
P: 602.431.8887 • www.pnltest.com

PNL REF. # 26-251512 S.O. # 001 INDEX 03

Page 1 of 3

					rage 1013
CLIENT		T DESCRIPTION		CLIENT ORDER NO.	
Diversi-Tech Corp	oration Multiba	allast DB to N	/letal Roof Load ∃	Γest	per S.A.
PNL PROJECT NO.	S.O. NO.	TEST	DATE		REPORT DATE
26-251512	001	10/13	3/2025		10/15/2025
	TEST CONDITI	IONS & EQUIPM	ENT INFORMATION		
Temperature:	73 °F ± 5 °F		Hum	idity:	50 % ± 5 %
Equipment Model:	Instron 5989 UTM	Л	Serial Number:		B22667
Load Cell:	100 kN (22,481 lbf) [S/N:	158544]	Test Speed:		6 in./min.
	TEST	SPECIMEN INFO	ORMATION		
Test Specimen 1:	Multiballast DB		Dimensions:	~	1-3/8 in. x 11-3/4 in. x 4-3/4 in.
Test Specimen 2:	Metal Roof		Dimensions:		~ 1 in. x 23 in. x 17 in.
Test Specimen 3:	H-Module Bracke	t	Dimensions:		~ 2-1/2 in. x 3-1/4 in. x 1 in.
Test Specimen 4:	Tower-Module Brac	ket	Dimensions:	~	3-3/4 in. x 3-3/16 in. x 3-1/4 in.
Adhesive:	Sikaflex 1a Construction	Sealant	Cure Time:		Unknown

The Multiballast DB was bonded to a piece of sheet metal used for roofing (~29 gauge .016") by the client using Sikaflex 1a construction sealant (one part polyurethane, elastomeric sealant/adhesive)(photos 1 & 2). It was noted that no surface prep was done on the aluminum bracket or the metal roof, and the test specimens were left in the bed of a pickup overnight during a storm. The test assembly was then clamped to the table of our universal test machine (UTM) using 2x4's and plywood to give adequate clamping force without prematurely damaging the assembly.

Test Summary: Multiballast DB to Metal Roof

The H-module bracket was installed on the Multiballast DB base mount using the designed slide rails for installation. Using only 1 of the 2 mounting holes on the H-module the UTM was bolted to the H-module bracket (photos 3 & 4) and applied a tensile force pulling straight up on the bracket at a test speed of 6 in./min.

	TENSION LOAD TEST DATA							
Test No.	Test Specimen	Displacement at Maximum Load (in.)	Maximum Load (lbf)	Glue Contact Area (sq. in.)	Adhesive Strength (lbf/in)	Observations		
1	Multiballast DB bonded to metal roof #1 with H-module (Photo 3)	0.782	520	5.1	N/A	@ ~410 lbf deformation was noted in the "H" bracket, and @ ~520 lbf test stopped when "H" bracket slipped out of aluminum extrusion.		
2	Multiballast DB bonded to metal roof #2 with H-module (Photo 4)	0.652	510	5.1	100	@ ~430 lbf deformation was noted in the "H" bracket, and @ ~520 lbf test stopped when 2 corners of the Multiballast DB de-bonded, aluminum to elastomeric sealant		

	Ollar brothon	
TECHNICIAN	MUDICIUMINI	REVIEWED BY





Page 2 of 3

CLIENT		PROJECT/TEST DESCRIPTION	CLIENT ORDER NO.
Diversi-Tech Corporation		Multiballast DB to Metal Roof Load Test	per S.A.
PNL PROJECT NO.	S.O. NO.	TEST DATE	REPORT DATE
26-251512	001	10/13/2025	10/15/2025

TEST GRAPHS

Specimen 1 to 2

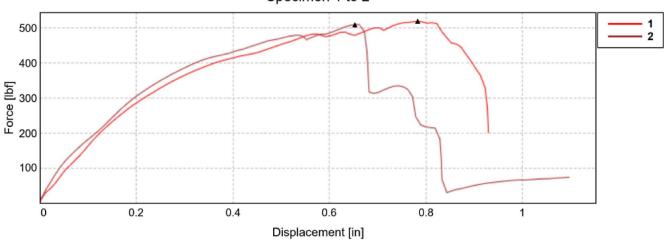


Figure 1: Tensile Force vs Displacement test graph

Page 3 of 3

CLIENT		PROJECT/TEST DESCRIPTION	CLIENT ORDER NO.
Diversi-Tech Corporation		Multiballast DB to Metal Roof Load Test	per S.A.
PNL PROJECT NO.	S.O. NO.	TEST DATE	REPORT DATE
26-251512	001	10/13/2025	10/15/2025



Photo 1: Adhesive used



Photo 3: Tension test, setup #1



Photo 5: Tension test #1 "H" bracket slipped out



Photo 2: Test specimens provided by client



Photo 4: Tension test, setup #2



Photo 6: Tension test #2 adhesive failure, aluminum to adhesive interface



An Secompany

Phoenix National Laboratories, LLC

941 S. Park Lane, Tempe, AZ 85281
P: 602.431.8887 • www.pnltest.com

PNL REF. # 26-251512 S.O. # 001 INDEX 05

Page 1 of 5

					raye i ui s	
CLIENT	CLIENT PROJECT/TEST DESCRIPTION					
Diversi-Tech Corp	ooration Mu	ıltiballast DB to Ce	ement Board Load	d Tes	t per S.A.	
PNL PROJECT NO.	S.O. NO.	TES	T DATE		REPORT DATE	
26-251512	001	10/13	3/2025		10/15/2025	
	TEST C	ONDITIONS & EQUIPM	ENT INFORMATION			
Temperature:	73 °F	±5°F	Hum	idity:	50 % ± 5 %	
Equipment Model:	Instron 5	989 UTM	Serial Number:		B22667	
Load Cell:	100 kN (22,481 ll	bf) [S/N: 158544]	Test Speed:		Varies (See test summary)	
		TEST SPECIMEN INF	ORMATION			
Test Specimen 1:	Multibal	llast DB	Dimensions:	~	1-3/8 in. x 11-3/4 in. x 4-3/4 in.	
Test Specimen 2:	Cemen	t Board	Dimensions:		~ 3/8 in. x 13 in. x 15-1/2 in.	
Test Specimen 3:	H-Module	e Bracket	Dimensions:		~ 2-1/2 in. x 3-1/4 in. x 1 in.	
Test Specimen 4:	Tower-Mod	ule Bracket	Dimensions:	~	3-3/4 in. x 3-3/16 in. x 3-1/4 in.	
Adhesive:	Sikaflex 1a Cons	struction Sealant	Cure Time:		Unknown	

Test Summary: Multiballast DB to Cement Board

The Multiballast DB was bonded to a cement board by the client using Sikaflex 1a construction sealant (one part polyurethane, elastomeric sealant/adhesive) (photos 1 & 2). It was noted that no surface prep was done on the aluminum bracket or the cement board, and the test specimens were left in the bed of a pickup overnight during a storm. The test assembly was then clamped to the table of our universal test machine (UTM) using 2x4's and plywood to give adequate clamping force without prematurely damaging the assembly (photos 3 & 6).

The H-module bracket was installed on the Multiballast DB base mount using the designed slide rails for installation. Using only 1 of the 2 mounting holes on the H-module the UTM was bolted to the H-module bracket and applied an upwards tensile force on the bracket at a test speed of 6 in./min. This led to a failure of the H-module, bolted connection between the UTM and the H-module bracket started slipping (photos 4 & 5). The H-module was then pulled off and the riser bracket was put on, allowing the tensile force to be distributed over more area and with more engagement to the Multiballast DB base mount. This allowed a high enough load to witness an adhesive failure (photos 6 & 7).

A shear racking "lateral load" test was also run on this specimen. A test fixture (Photo 8) was used that allowed us to clamp the test specimen at a 90-degree angle to the UTM crosshead. The specimen was clamped to the fixture using c-clamps and some flat steel to distribute the clamping force across the whole board (photo 9). Using only 1 of the 2 mounting holes on the H-module, the UTM was bolted to the H-module bracket, and a downward compressive force was applied at a test speed of 1 in./min on the side of the side of the H-module bracket until an adhesive failure was witnessed (photo 12).

	Ollow brothers	
TECHNICIAN	VVXXVIVIVIVIV	REVIEWED BY





Page 2 of 5

						Page 2 of 5	
	CLIENT		PROJECT	/TEST DESC	RIPTION	CLIENT ORDER NO.	
Diversi-Tech Corporation Mu			Multiballast DB to Cement Board Lo			oad Test per S.A.	
	PNL PROJECT NO. S.O.	NO.	TE	ST DATE		REPORT DATE	
	26-251512 00)1	10/	13/2025		10/15/2025	
	TENSION LOAD TEST DATA						
Test No.	Test Specimen	Displacement at Maximum Load (in.)	Maximum Load (lbf)	Glue Contact Area (sq. in.)	Adhesive Strength (lbf/in)	Observations	
1	Multiballast DB bonded to cement board #1 with H bracket (Photo 3)	0.622	525	8.5	N/A	@ ~450 lbf the "H" bracket started to deform and @ ~519 lbf the bolt clamping the "H" bracket to the UTM started slipping	
2	Multiballast DB bonded to cement board #1 with Riser bracket (Photo 6)	0.222	821	7.8	106	@ ~821 lbf the Multiballast DB de-bonded, elastomeric sealant to cement board bond	
	L <i>A</i>	TERAL LOAD	"SHEAR R	ACKING" 1	TEST DATA	1	
Test No.	Test Specimen	Displacem Maximum L			ım Load n.)	Observations	
1	Multiballast DB bonded to cement board #2 with tower bracket (Photo 8)	0.517	7	6	78	 @ ~450 lbf the "H" bracket tab pulled out and the teeth sections engaged, load increased up to max load then deformation started. @ 0.83 in. Displacement is 1st adhesive drop. 2nd adhesive drop triggered end of test, aluminum to adhesive bond 	

LABORATORY TEST REPORT

PNL REF. # 26-251512 S.O. # 001 INDEX 05



Page 3 of 5

CLIENT		PROJECT/TEST DESCRIPTION	CLIENT ORDER NO.
Diversi-Tech Corporation	Mu	Itiballast DB to Cement Board Load Test	per S.A.
PNL PROJECT NO.	S.O. NO.	TEST DATE	REPORT DATE
26-251512	001	10/13/2025	10/15/2025

TEST GRAPHS

Specimen 1 to 2

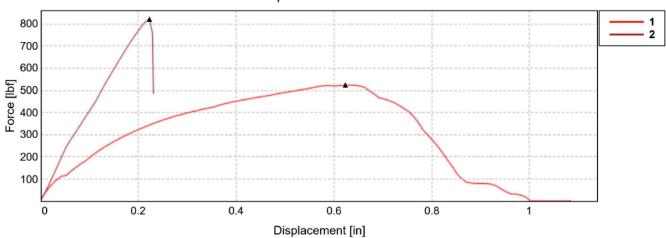


Figure 1: Tensile Force vs Displacement test graph

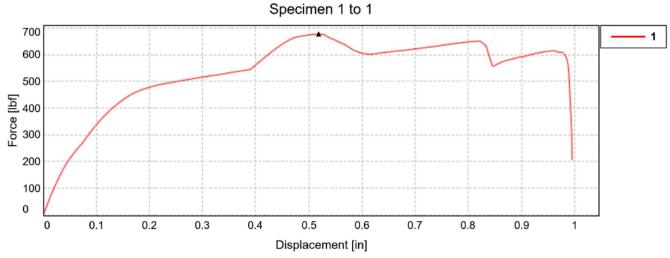


Figure 2: Lateral Load "Shear Racking" Compressive Force vs Displacement test graph

Page 4 of 5

CLIENT	PROJECT/TEST DESCRIPTION		CLIENT ORDER NO.
Diversi-Tech Corporation	Multiballast DB to Cement Board Load Test		per S.A.
PNL PROJECT NO.	S.O. NO.	TEST DATE	REPORT DATE
26-251512	001	10/13/2025	10/15/2025



Photo 1: Adhesive used



Photo 3: Tension test, setup #1



Photo 5: Bolt slipping out of "H" bracket



Photo 2: Test specimens provided by client



Photo 4: Approximate load before bolt slipped, 520 lbf



Photo 6: Tension test, setup #2

Page 5 of 5

CLIENT		PROJECT/TEST DESCRIPTION	CLIENT ORDER NO.
Diversi-Tech Corporation	Multiballast DB to Cement Board Load Test		per S.A.
PNL PROJECT NO.	S.O. NO.	TEST DATE	REPORT DATE
26-251512	001	10/13/2025	10/15/2025



Photo 7: De-bond between the adhesive to cement board interface



Photo 9: UTM bolted to specimen



Photo 11: "H" bracket deformation post test




Photo 8: Lateral load test, setup #3



Photo 10: "H" bracket deformation post test



Photo 12: De-bond between the aluminum to adhesive interface



PRELIMINARY LABORATORY TEST REPORT

PNL REF. # 26-251512 S.O. # 001 INDEX 02

And Company

Phoenix National Laboratories, LLC
941 S. Park Lane, Tempe, AZ B5281
P: 602.431.8887 · www.pnltest.com

Page 1 of 3

CLIENT	DDO IECT	TEST DESCRIPTION	CLIENT ORDER NO.	
CLIENT		PROJECT/TEST DESCRIPTION		
Diversi-Tech Corpora	ation Multiballast D	Multiballast DB Compression Test		
PNL PROJECT NO.	S.O. NO.	TEST DATE	REPORT DATE	
26-251512	001 10	01 10/13/2025		
TEST CONDITIONS & EQUIPMENT INFORMATION				
Temperature:	73 °F ± 5 °F	Humi	dity: 50 % ± 5 %	
Equipment Model:	Instron 5989 UTM	Serial Num	ber: B22667	
Load Cell:	100 kN (22,481 lbf) [S/N: 158544]	Test Sp	eed: 2 in./min.	
TEST SPECIMEN INFORMATION				
Test Specimen 1:	Multiballast DB	Dimensions:	~1-3/8 in. x 11-3/4 in. x 4-3/4 in.	
Test Specimen 2:	H-Module Bracket	H-Module Bracket Dimensions:		
Test Summary: Multiballast DB Base Compression Test				

The Multiballast DB base with a H-module bracket was set on top of two 2x4's that had a spacing of 8" between the 2x4's (photos 1 and 2). The H-module bracket was installed on the Multiballast DB base mount using the designed slide rails for installation. Using

both of the mounting holes on the H-module the universal test machine (UTM) was bolted to the H-module bracket applied a compression force pushing straight down on the bracket H-module bracket and the Multiballast DB base at a test speed of 2 in./min.

COMPRESSION LOAD TEST DATA				
Test No.	Test Specimen	Displacement at Maximum Load (lbf)	Maximum Load (in.)	Observations
1	Multiballast DB base with H- module bracket	0.888	2,653	Test stopped due to permanent deformation to the Multiballast DB base.

	(I lax lovathon ?	
TECHNICIAN	VUX DONOTO TO	REVIEWED BY





Page 2 of 3

CLIENT		PROJECT/TEST DESCRIPTION	CLIENT ORDER NO.
Diversi-Tech Corporation	า	Multiballast DB Compression Test	per S.A.
PNL PROJECT NO.	S.O. NO.	TEST DATE	REPORT DATE
26-251512	001	10/13/2025	10/15/2025

TEST GRAPHS

Specimen 1 to 1

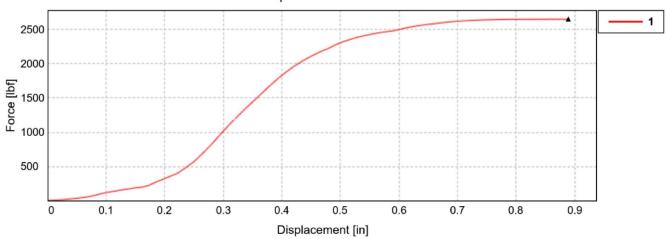


Figure 1: Compressive Force vs Displacement test graph

Page 3 of 3

CLIENT		PROJECT/TEST DESCRIPTION	CLIENT ORDER NO.
Diversi-Tech Corporation	ech Corporation Multiballast DB Compression Test		per S.A.
PNL PROJECT NO.	S.O. NO.	TEST DATE	REPORT DATE
26-251512	001	10/13/2025	10/15/2025



Photo 1: Test setup

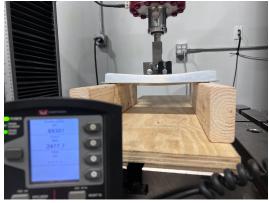


Photo 3: 2477 lbf load applied after test manually stopped



Photo 5: Deformation post testing




Photo 2: 8" spacing between 2x4's



Photo 4: Deformation post testing



Photo 6: Deformation post testing